

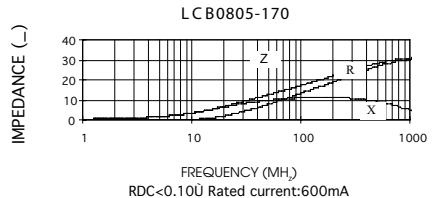
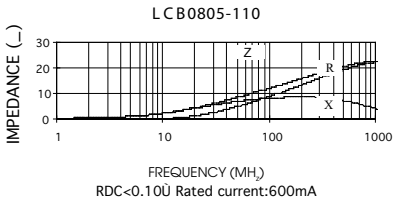


# LCB 0805 Multi-Layer Chip Beads

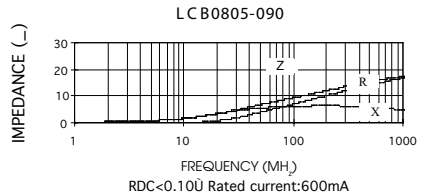

Test Instruments: HP4291A Impedance / Material Analyzer


Part Number	Test Freq. (MHz)	Impedance (Z(±25%))	DCR (Ω) Max	Rated Current (mA) Max.
LCB0805-070	100	7	0.10	600
LCB0805-090	100	9	0.10	600
LCB0805-110	100	11	0.10	600
LCB0805-170	100	17	0.10	600
LCB0805-320	100	32	0.10	600
LCB0805-600	100	60	0.15	500
LCB0805-700	100	70	0.15	500
LCB0805-800	100	80	0.15	500
LCB0805-121	100	120	0.25	300
LCB0805-151	100	150	0.25	300
LCB0805-221	100	220	0.30	300
LCB0805-301	100	300	0.30	300
LCB0805-401	100	400	0.30	300
LCB0805-501	100	500	0.40	300
LCB0805-601	100	600	0.40	300
LCB0805-751	100	750	0.50	200
LCB0805-102	100	1000	0.50	200
LCB0805-152	100	1500	0.60	200
LCB0805-202	100	2000	0.80	100
LCB0805-222	100	2200	1.00	100
LCB0805-252	100	2500	1.0	100
LCB0805-272	100	2700	1.5	100

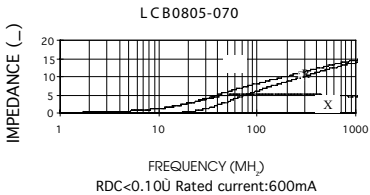

# LCB 0805 Multi-Layer Chip Beads




LCB0805-320

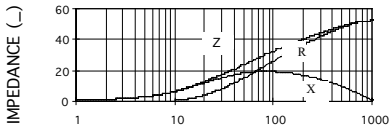


FREQUENCY (MHz)  
RDC<0.15Ω Rated current:600mA

LCB0805-600

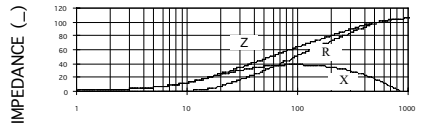


FREQUENCY (MHz)  
RDC<0.15Ω Rated current:500mA

LCB0805-700

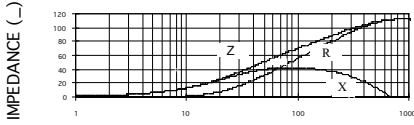


FREQUENCY (MHz)  
RDC<0.15Ω Rated current:500mA

LCB0805-800

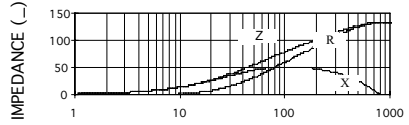


FREQUENCY (MHz)  
RDC<0.15Ω Rated current:500mA

LCB0805-121

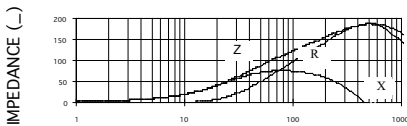


FREQUENCY (MHz)  
RDC<0.15Ω Rated current:600mA

LCB0805-151

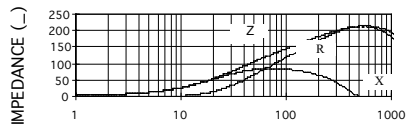


FREQUENCY (MHz)  
RDC<0.25Ω Rated current:300mA

LCB0805-221

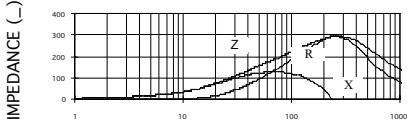


FREQUENCY (MHz)  
RDC<0.30Ω Rated current:300mA

LCB0805-301

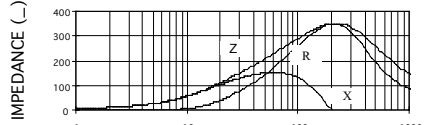


FREQUENCY (MHz)  
RDC<0.30Ω Rated current:300mA

LCB0805-401

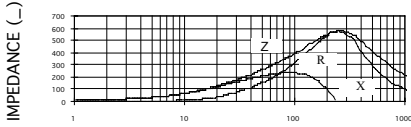


FREQUENCY (MHz)  
RDC<0.30Ω Rated current:300mA

LCB0805-501

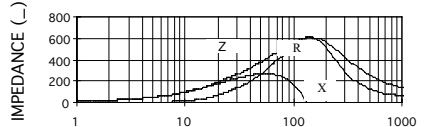


FREQUENCY (MHz)  
RDC<0.40Ω Rated current:300mA

LCB0805-601

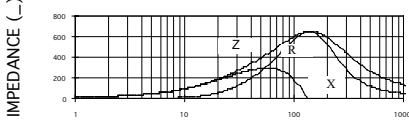

FREQUENCY (MHz)  
RDC<0.40Ω Rated current:300mA

LCB0805-751

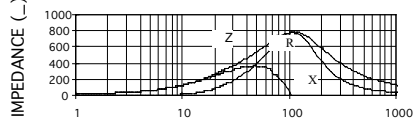

FREQUENCY (MHz)  
RDC<0.50Ω Rated current:200mA

# LCB 0805 Multi-Layer Chip Beads

