


# LCB1612/A Power Beads



## FEATURES

- ◇ Extremely high reliability in a wide temperature and humidity range.
- ◇ Superior Q.
- ◇ Excellent for flow, re-flow soldering.

## APPLICATIONS


- ◇ High Frequency Circuits.
- ◇ Hand Held Electronics.

**INDUCTANCE:** 1.0 N

**OPERATING TEMPERATURE RANGE:** -40°C TO +100°C

**TOLERANCES:** 2%, 5% AND 10%

LCB1612A

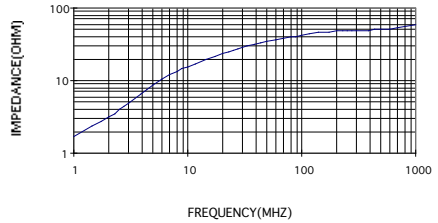

## DIMENSIONS IN MM

Part Number	Test Frequency		DC R ( $\Omega$ ) Max
	25MHz	100MHz	
LCB1612A	24 $\Omega^{\circ}$	36 $\Omega^{\circ}$	36 $\Omega^{\circ}$