

**CONTACT INFORMATION**

Contact Person \_\_\_\_\_ Email \_\_\_\_\_  
 Company \_\_\_\_\_ Phone \_\_\_\_\_ Ext \_\_\_\_\_ Fax \_\_\_\_\_  
 General Application of this product: \_\_\_\_\_


Please complete the relevant information below for the critical parameters of the part.

**ELECTRICAL REQUIREMENTS**

Approximate Output Power: \_\_\_\_\_ VA      Duty Cycle: \_\_\_\_\_ %  
 Minimum Line Frequency (Hz): \_\_\_\_\_      Primary Input Voltage:  
 50 60 400 1K 100K 150K 250K Other: \_\_\_\_\_      90 100 115 120 200 230 240 115 / 230 Other: \_\_\_\_\_  
 Maximum Temperature Rise (°C): \_\_\_\_\_      Protection [Resettable or Single Use]:  
 10 20 30 40 50 Other: \_\_\_\_\_      Thermal Fused Other: \_\_\_\_\_  
 Efficiency: \_\_\_\_\_ %      Regulation: \_\_\_\_\_ %  
 Isolation Voltage: \_\_\_\_\_ Vac / Vdc      Leakage Inductance (LI): \_\_\_\_\_ µH  
 Interwinding Capacitance [Ciw]: \_\_\_\_\_ pF

**SCHEMATIC**

Voltage: \_\_\_\_\_  
 Current: \_\_\_\_\_  
 L: \_\_\_\_\_  
 Voltage: \_\_\_\_\_  
 Current: \_\_\_\_\_  
 L: \_\_\_\_\_  
 Voltage: \_\_\_\_\_  
 Current: \_\_\_\_\_  
 L: \_\_\_\_\_  
 Voltage: \_\_\_\_\_  
 Current: \_\_\_\_\_  
 L: \_\_\_\_\_  
 Screen or Shield  
 Thick: \_\_\_\_\_  
 Material: \_\_\_\_\_

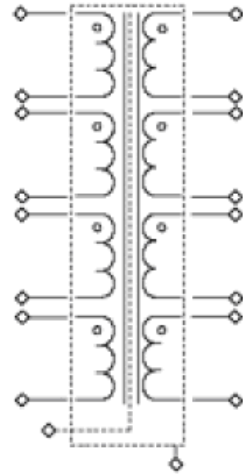

Voltage: \_\_\_\_\_ AC or DC      Other Requirements: \_\_\_\_\_  
 Current: \_\_\_\_\_ Rms or Peak  
 Rect: \_\_\_\_\_ HW FW FWB  
 Voltage: \_\_\_\_\_ AC or DC      Other Requirements: \_\_\_\_\_  
 Current: \_\_\_\_\_ Rms or Peak  
 Rect: \_\_\_\_\_ HW FW FWB  
 Voltage: \_\_\_\_\_ AC or DC      Other Requirements: \_\_\_\_\_  
 Current: \_\_\_\_\_ Rms or Peak  
 Rect: \_\_\_\_\_ HW FW FWB  
 Voltage: \_\_\_\_\_ AC or DC      Other Requirements: \_\_\_\_\_  
 Current: \_\_\_\_\_ Rms or Peak  
 Rect: \_\_\_\_\_ HW FW FWB  
 Outer Shield  
 Thick: \_\_\_\_\_ Budgetary / Target Price: \_\_\_\_\_  
 Material: \_\_\_\_\_ @ \_\_\_\_\_

**PHYSICAL REQUIREMENTS**

Flame Retardant:	Yes	No	Mounting Style:	Vertical or Horizontal	
Standard Varnish:	Yes	No	Thru Hole	Surface Mount	Flying Leads      Other
Encapsulated:	Yes	No	Inside Diameter (Min.):	_____	
Hermetically Sealed:	Yes	No	Length (Max.):	_____	
Shielded:	Yes	No	Width (Max.):	_____	Temperature Class (°C):
RoHS Compliant:	Yes	No	Height (Max.):	_____	105   130   155   180   200

**OTHER REQUIREMENTS**

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_ Continue on separate sheet if necessary)

**PRIORITIZATION (1 – HIGHEST)**

\_\_\_\_\_ Size  
 \_\_\_\_\_ Efficiency  
 \_\_\_\_\_ Cost

Pin Requirements


Grid Units: \_\_\_\_\_