
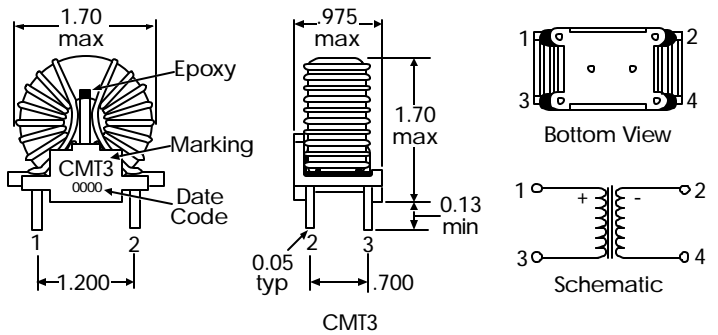
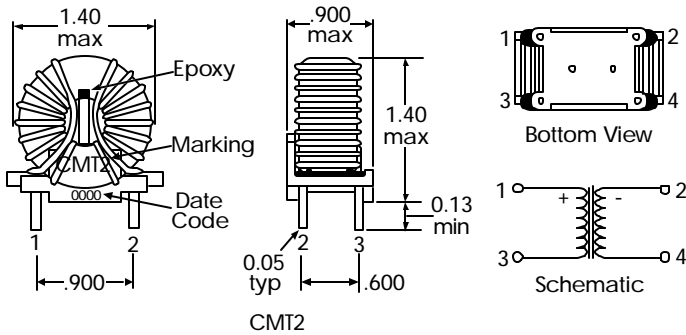
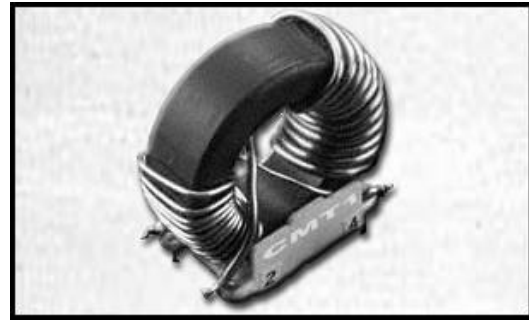


# Common Mode Choke CMT

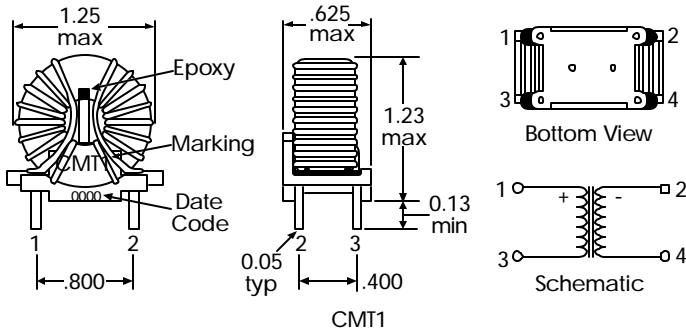

**Notes:**

- (1) Dielectric Withstanding: 1250 Vms between windings.
- (2) Base materials UL94VO rating. Class 130°C.

PART NUMBER	INDUCTANCE (MHY) MIN	LEAKAGE INDUCTANCE (μhy) MAX	CURRENT RATING (AMPS)	DC RESISTANCE OHMS MAX (Ω)
<b>CMT1</b>				
CMT1-1	3.50	62	1.30	0.150
CMT1-2	1.70	32	2.00	0.065
CMT1-3	1.00	22	3.20	0.036
CMT1-4	0.75	19	5.00	0.022
CMT1-5	0.425	10	8.10	0.012
CMT1-6	0.275	8	0.008	0.008
<b>CMT2</b>				
CMT2-1	0.58	10	13.00	0.010
CMT2-2	0.80	10	15.00	0.007
CMT2-3	0.90	17	9.00	0.014
CMT2-4	1.1	20	8.10	0.020
CMT2-5	1.5	15	9.00	0.013
CMT2-6	1.8	21	6.00	0.029
CMT2-7	1.9	26	4.00	0.038
CMT2-8	2.2	35	5.00	0.040
CMT2-9	3.3	45	4.00	0.055
CMT2-10	3.7	60	3.20	0.080
CMT2-11	7.0	100	2.00	0.150
CMT212	10.8	165	1.30	0.290
<b>CMT3</b>				
CMT3-1	2.5	42	15.00	0.019
CMT3-2	3.0	40	12.00	0.022
CMT3-3	4.0	37	9.00	0.026
CMT3-4	4.4	48	15.00	0.017
CMT3-5	5.2	47	12.00	0.025
CMT3-6	6.6	49	6.00	0.048
CMT3-7	8.0	58	4.00	0.061
CMT3-8	14.0	180	4.00	0.120
CMT3-9	16.0	210	2.00	0.240
CMT3-10	28.0	410	2.00	0.330
CMT3-11	32.0	400	1.00	0.650
CMT3-12	56.0	780	1.00	0.900