
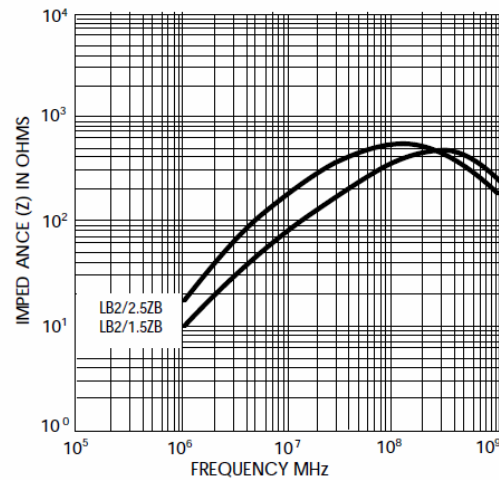
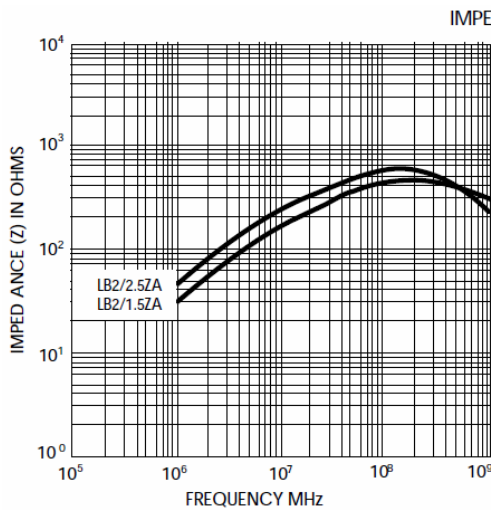
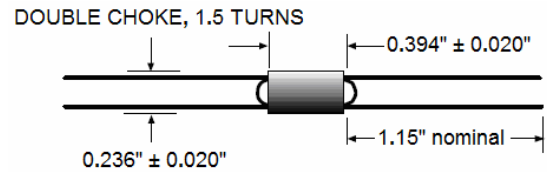


Leads: # 22 AWG. Dimensions in inches.

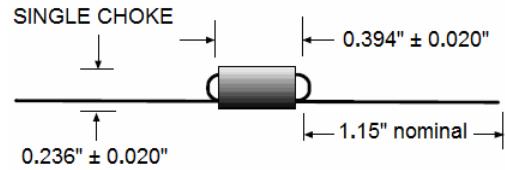

PART NUMBER	MECHANICAL CHARACTERISTICS		ELECTRICAL CHARACTERISTICS			
	NUMBER OF TURNS	NUMBER OF WINDINGS	MAX IMPEDANCE		DECREASE OF IMPEDANCE IN FREQUENCY RANGE	
			Z MAX [KΩ]	FREQUENCY MHz	MHz	DB
LB2/1.5ZA	1.5	1	> .28	120	10 . 300	- 7
LB2/1.5ZB	1.5	1	> .36	250	80 . 300	- 3
LB2/2.5ZA	2.5	1	> .60	50	10 . 220 30 . 100	- 7 - 3
LB2/2.5ZB	2.5	1	> .68	180	50 . 300 80 . 220	- 6 - 3
LB2/2X1.5ZA	1.5	2	> .72	50	10 . 220 30 . 100	- 7 - 3
LB2/2X1.5ZB	1.5	2	> .80	110	50 . 300 30 . 100	- 7 - 3
LB2/3.0ZA	3.0	1	> .70	50	10 . 220	- 7
LB2/3.0ZB	3.0	1	> .80	110	50 . 300	- 7

Three-turn axial-leaded chokes available upon request.